


MKU LNA 131 AH SMA, Low Noise HEMT Preamplicifier 1296 MHz

Super Low Noise HEMT Preamplicifier for DX and EME

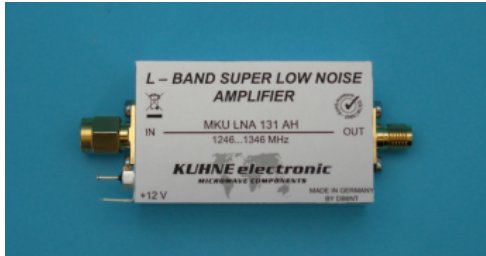

Description

For many years, our super low noise microwave preamplicifier has been used very successful. Many results of Ham Radio Contests proof that! Due to a extremely low noise figure the preamplicifier is ideal for tropo DX, EME (earth moon earth operation) and for receiving satellites.

Features

- Extremely low noise figure
- Good input return loss (low VSWR)
- Unconditionally stable - no parasitic oscillations in case of poor antenna match
- Professional milled aluminium case
- Small mechanical dimensions
- Male connector at the input for direct connection to antenna or coaxial relay

Important notes

- Amplifier does not contain a coaxial relay!
- Maximum input power 1 mW

Technical specifications:

Frequency range	1246..1346 MHz
Noise figure @ 18 °C	0.4 dB +/- 0,05
Gain	typ. 20 dB
Maximum input power	1 mW
Supply voltage	+9 ... 15 V DC
Current consumption	typ. 15 mA
Operating case temp. range	-20 ... +65°C
Input connector / impedance	SMA-male, 50 ohms
Output connector / impedance	SMA-female, 50 ohms
Case	milled aluminium
Dimensions (mm)	50 x 30 x 22
Weight	100 g (typ.)